

SX30XP 95 G/M²

PROPERTIES


Article number	SX30XP
Weight transfer paper	95 g/m ²
Available roll width	111 cm, 162 cm, 257 cm, 320 cm
Available roll length	100 m, 120 m, 150 m, 200 m, 300 m
Dye sub coating type	Semi-porous coating
Suitable for segment	Metal, aluminium or ceramics, Textile, Textile non-porous
Drying properties	Standard drying
Core	3"
Printing side	Outside

USP's

- Very fast drying
- Superb stability against wet cockling
- Semi-porous coating – reduces outgassing
- Available in rolls for Epson (<15 cm diameter)
- Suitable for metal and ceramics

TexoTrans SX

SX30XP
95 g/m²

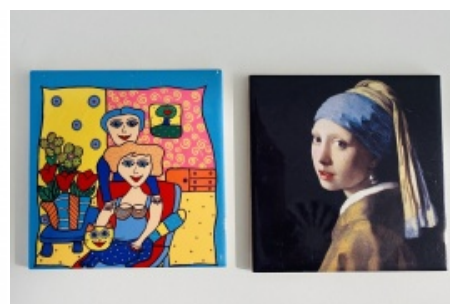

Notice: TTS' products must be tested to determine the suitability of the product in combination with your equipment and methods of use. TTS maximum obligation shall be to replace any product supplied by TTS, which has been proven to be defective. TTS is not liable for any injury, direct or consequential, arising from the use of, or the inability to use our products.

The above mentioned data are according to the latest state and are non-binding. For all technical data is a valid tolerance of 5%. We reserve the right for technical modifications.