


## HOT-PEEL DTF FILM

### PROPERTIES

<b>Article number</b>	HCS075/2-DTF-HP
<b>Available roll width</b>	30 cm, 60 cm
<b>Available roll length</b>	100 m
<b>Base material</b>	PET Film
<b>Coating silkscreen</b>	Two sided matt and one sided release coated
<b>Compatible inks</b>	Water-based
<b>OEKO-TEX® Certified</b>	Yes
<b>Peel force</b>	Medium
<b>Printing side</b>	Outside
<b>Peel type</b>	Hot-peel
<b>Pressing instructions</b>	140 °C – 10 seconds
<b>Stability</b>	Thermo stabilised with anti-static treatment
<b>Thickness base film</b>	75 micron
<b>Transfer finish</b>	Matt

### USP's

- Matt finish
- Available in rolls of 30 and 60 cm for DTF printers
- Hot-Peel

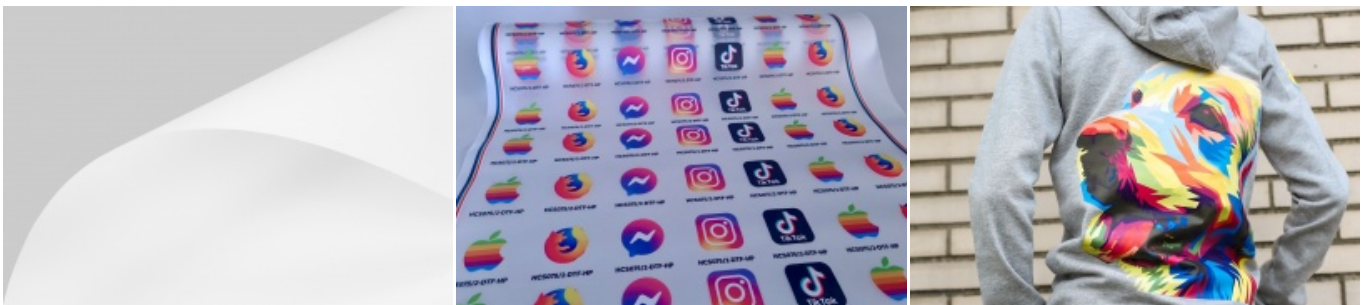

**Notice:** TTS' products must be tested to determine the suitability of the product in combination with your equipment and methods of use. TTS maximum obligation shall be to replace any product supplied by TTS, which has been proven to be defective. TTS is not liable for any injury, direct or consequential, arising from the use of, or the inability to use our products.

The above mentioned data are according to the latest state and are non-binding. For all technical data is a valid tolerance of 5%. We reserve the right for technical modifications.